

UPRIGHT TANK

HIGH- PERFORMANCE HEAT EXCHANGER UPRIGHT TANK

HRS 300

HRS 400

HRS 500

HRS 750


HRS 900



AE
Austria Email

HIGH-PERFORMANCE HEAT EXCHANGER UPRIGHT TANK - HRS 750, 900

HRS 750, 900

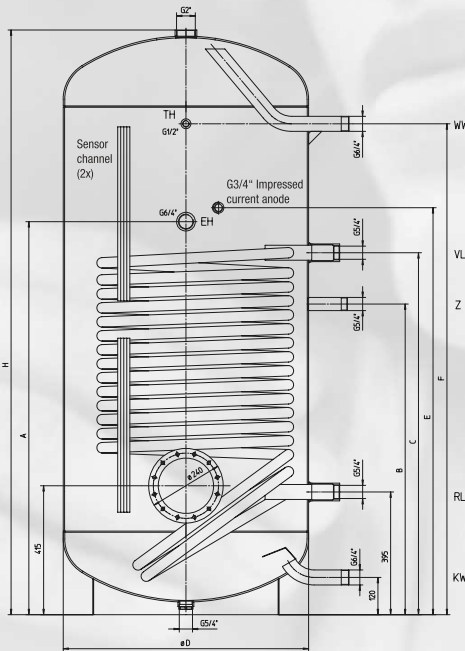

- Internal boiler enamelled according to DIN 4753 T3 and T6
- Operating pressure: max. 10 bar
- Operating temperature: max. 95 °C
- Straight-tube heat exchanger with very large heating surfaces
- With new ECO SKIN insulation 100 mm
- Circulation: $\frac{5}{4}$ "
- Variable sensor position (sensor channel)
- High-quality dial thermometer attached
- With built-in impressed current anode
- $\frac{6}{4}$ " sleeve for SH screw-in heater for electrical backup heating (sealed)

ACCESSORIES:

- Mounted thermometer charge pump controller combination AT R
- Flange immersion heater, 240 mm
- $\frac{6}{4}$ " screw-in heater, "SH" series
- Impressed current anode (add-on kit)
- Finned tube heat exchanger
- For more information, please see our accessories brochure

	Impressed current anode											
Supply temperature	55°C	55°C	55°C	55°C	60°C	60°C	60°C	60°C	65°C	65°C	65°C	65°C
Hot water temperature	45°C	45°C	45°C	45°C	50°C	50°C	50°C	50°C	55°C	55°C	55°C	55°C
Cold water temperature	10°C	10°C	10°C	10°C	10°C	10°C	10°C	10°C	10°C	10°C	10°C	10°C
Heating circuit flow rate	600l/h	1200l/h	1800l/h	2400l/h	600l/h	1200l/h	1800l/h	2400l/h	600l/h	1200l/h	1800l/h	2400l/h
HRS 300	16,0	22,7	26,4	28,8	17,7	25,1	29,1	31,7	20,7	29,7	34,8	38,1
HRS 400	18,6	27,4	32,4	35,7	20,6	30,2	35,7	39,4	22,5	33,0	39,1	43,0
HRS 500	20,5	30,9	37,1	41,2	22,6	34,1	40,9	45,4	24,7	37,2	44,7	49,7
HRS 750	20,5	30,9	37,1	41,2	22,6	34,1	40,9	45,4	24,7	37,2	44,7	49,7
HRS 900	22,5	35,5	44,9	52,1	24,0	38,4	48,5	56,1	25,8	41,2	51,9	60,0



WE MANUFACTURE
IN AUSTRIA AND
DELIVER TO EUROPE



AE
Austria Email

Centrala i zakład produkcyjny
Austria Email AG
A-8720 Knittelfeld, Austriastraße 6
Tel.: (03512) 700-0, faks: (03512) 700-239
www.austria-email.at

 **Multiinstal
Group**

Multiinstal Group Sp. z o.o.
ul. Towarowa 1, 83-034 Trąbki Wielkie
Tel: +48 41 202 05 48
E-mail: biuro@multiinstal.pl
www.multiinstal.pl